

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 254 932 A2**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
06.11.2002 Bulletin 2002/45

(51) Int Cl.7: **C09D 11/00**(21) Application number: **02253012.5**(22) Date of filing: **29.04.2002**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

- Austin, Mary E.  
Corvallis, OR 97330 (US)
- Lauw, Hiang P.  
Corvallis, OR 97330 (US)
- Parazak, Dennis P.  
Oceanside, CA 92056 (US)
- Rehman, Zia  
Corvallis, OR 97330 (US)

(30) Priority: **04.05.2001 US 848810**



(71) Applicant: **Hewlett-Packard Company**  
**Palo Alto, CA 94304 (US)**

(74) Representative: **Jackson, Richard Eric et al**  
**Carpmaels & Ransford,**  
**43 Bloomsbury Square**  
**London WC1A 2RA (GB)**


(72) Inventors:  
• **Adamic, Raymond J.**  
**Corvallis, OR 97330 (US)**

**(54) Dye based ink set for ink jet printing**

(57) Color ink sets for use in printer systems are provided and formulated to provide improved plain paper and special media performance while maintaining good printing characteristics. The inks and ink sets of the present invention exhibit excellent color performance and lightfastness across a range of media, robust K/Y bleed resistance on plain paper at fast print speeds, as well as excellent printability and reliability. A specific dye set for formulating yellow, magenta, and cyan inks comprises a mixture of acid yellow 23 (AY23) and direct yellow 132 (DY132), a cyan dye compound having the formula:



wherein Pc represents a phthalocyanine nucleus; and a magenta dye compound having formula:

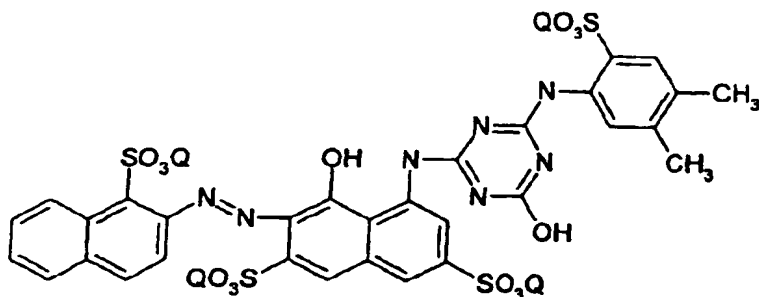

wherein Q is a cation.

## Description

## FIELD OF THE INVENTION

- 5 [0001] The present invention generally relates to ink-jet printing, and in particular, to a specific ink set suitable for use with an off-axis printer system.

## BACKGROUND OF THE INVENTION

- 10 [0002] Ink-jet printing is a non-impact printing process in which droplets of ink are deposited on a print medium in a particular order to form alphanumeric characters, area-fills, and other patterns thereon. Low cost and high quality of the hardcopy output, combined with relatively noise-free operation, have made ink-jet printers a popular alternative to other types of printers used with computers. One particular type of ink-jet printer, known as an off-axis printer, includes a replaceable print cartridge. A fluid interconnect on the print cartridge connects it to a separate ink supply located within the printer.

- 15 [0003] The non-impact printing process of ink-jet printing involves the ejection of fine droplets of ink onto a print medium such as paper, transparency film, or textiles in response to electrical signals generated by a microprocessor. There are two basic means currently available for achieving ink droplet ejection in ink-jet printing: thermally and piezoelectrically. In thermal ink-jet printing, the energy for drop ejection is generated by electrically heated resistor elements, which heat up rapidly in response to electrical signals from a microprocessor to create a vapor bubble, resulting in the expulsion of ink through nozzles associated with the resistor elements. In piezoelectric ink-jet printing, the ink droplets are ejected due to the vibrations of piezoelectric crystals, again, in response to electrical signals generated by the microprocessor.

- 20 [0004] Commercially-available off-axis ink-jet printers, such as a DeskJet® 2200 printer available from Hewlett-Packard Company, use inks of differing hues, namely, magenta, yellow, and cyan, and optionally black. The particular set of colorants, for example, dyes, used to make the inks is called a "primary dye set." A spectrum of colors, e.g., secondary colors, can be generated using different combinations of the primary dye set.

- 25 [0005] Any given perceived color can be described using any one of the color spaces, as is well known in the art. For example, in the CIELAB color space, a color is defined using three terms  $L^*$ ,  $a^*$ , and  $b^*$ .  $L^*$  defines the lightness of a color, and it ranges from zero (black) to 100 (white). The terms  $a^*$  and  $b^*$ , together, define the hue and chroma characteristics of a given color. The term  $a^*$  ranges from a more negative number, green, to a more positive number, red. The term  $b^*$  ranges from a more negative number, blue, to a more positive number, yellow.

- 30 [0006] To determine the concentration or amount of a given substance (e.g., a dye) in a solution, absorbance is commonly used by chemists. Many molecules and ions have the ability to absorb visible light. When these ions or molecules are present in solution, the amount of light absorbed is directly related to the number of molecules in solution. Each ion or molecule will have characteristic absorption spectra wherein the various wavelengths of light present in visible "white" light are differentially absorbed. It is desirable in most cases to measure the absorbance where the absorbance is strongest ( $\lambda_{max}$ ) or most sensitive. Absorbance values can be calculated according to Beers Law: Absorbance =  $Ebc$  where

- 40 a.  $E$  is equal to molar absorptivity which is an intrinsic property of the molecule  
b.  $b$  is equal to the path length the light must travel  
c.  $c$  is equal to the solution concentration

- 45 The resulting absorbance value can then be applied to determine the concentration of molecules. In the case of dyes, the absorbance is taken as the measure of concentration or amount of dye molecules present, just as weight would be used if dry material were used. In the manufacture of inks using dyes, it is desirable to use absorbance due to the expense associated in drying dyestuffs for the sole purpose of measuring the same by dry weight and redissolving them. There are health hazards associated with handling dried dye that require expensive safety procedures to be implemented and, often times, the raw dye from the manufacturer is not 100% pure, creating further problems. When working with a dyestuff that is not 100% pure, dry weight of dye is actually misleading as a given dry weight of dye could contain a variable number or concentration of dye molecules dependant on the purity, which are the functional element in the ink. By using absorbance as a measure of dye concentration the accurate reproducible manufacture of inks using dyes is assured.

- 50 [0007] In general, a successful ink set for color ink-jet printing must have the following properties: good crusting resistance, good stability, the proper viscosity, the proper surface tension, good color-to-color bleed alleviation, rapid dry time, consumer-safety, and low strike-through. When placed into a thermal ink-jet system, the ink set must also be kogation-resistant.

**[0008]** In addition, the ink set must be able to provide printed images having good color characteristics, such as correct hue and high chroma. While formation of colors on plain paper is required, it is also necessary that the ink set be useful on other print media, such as transparency film, coated paper, and photo paper. Another requirement for the ink set is to provide a hard copy output that is lightfast, thus preserving the integrity of the original color information.

**[0009]** While some of these conditions may be met by ink vehicle design, other conditions must be met by the proper selection and combination of the colorants. The selection of the colorants becomes especially important when additional limitations are placed on the choice of the colorants because of other system requirements, such as the color-to-color bleed control mechanism.

**[0010]** Regardless of whether an ink is dye-based or pigment-based, ink-jet inks commonly face the challenge of color-to-color or black-to-color bleed control. The term "bleed," as used herein, is defined to be the invasion of one color into another, once the ink is deposited on the print medium, as evidenced by a ragged border of mixed color therebetween. Bleed occurs as colors mix both on the surface of the paper substrate as well as within the substrate itself. The occurrence of bleed is especially problematic between a black ink and an adjacently-printed color ink because it is all the more visible. Hence, to achieve good print quality, bleed must be substantially reduced or eliminated such that borders between colors are clean and free from the invasion of one color into the other.

**[0011]** Many proposals are made to obtain high quality ink compositions for ink-jet printing which attempt to meet the above-mentioned characteristics. Although various inks are known which possess one or more of the foregoing properties, few inks possess all of these properties, since an improvement in one property often results in the degradation of another property. For example, to obtain improved color reproduction performance, U.S. Patent 5,143,547 discloses the combination of C.I. Acid Yellow 23, C.I. Direct Red 227, and C.I. Acid Blue 9; while U.S. Patent 5,145,519 discloses the combination of C.I. Direct yellow 86, C.I. Acid Red 52, and C.I. Acid Blue 9. These sets of ink compositions, however, possess a number of shortcomings. For example, the C.I. Yellow 23 for use in the yellow ink composition disclosed in U.S. Patent 5,143,547 has poor light resistance.


**[0012]** A different approach used for controlling bleed between the printed images, as disclosed in U.S. Pat. No. 5,428,383, is to provide a first ink composition comprising a first colorant, and a second ink composition comprising a second colorant and a precipitating agent (e.g., inorganic salts), which will react with the first colorant in the first ink composition so that upon contact of the first ink and the second ink on the printing medium a precipitate is formed, thus preventing color bleed between the first ink composition and the second ink composition.



**[0013]** Likewise, many inks used commercially represent a compromise in an attempt to achieve an ink evidencing at least an adequate response in each of the aforementioned characteristics. For example, a number of inks and ink sets suffer from black to color bleed which make their use less desirable or impossible for a number of color-intensive printing applications. Likewise, many of the known inks and ink sets suffer from poor lightfastness and humid hue shift/bleed on special media. Other problems are encountered when attempting to use these known inks and ink sets in reservoir based off-axis printing systems. In view of the foregoing, there exists a need in the industry for inks that work well in both fiber and foam based off-axis systems as well as in pens/cartridges without any fiber or foam material, and for ink formulations which have improved properties and which do not improve one property at the expense of the others, such as image quality, light fastness, architecture, performance and reliability. More specifically, there exists a need for improved black-to-yellow (K/Y) bleed for faster plain paper printing, no humid hue shift/bleed for magenta inks on special media, good plain paper chroma and lightfastness, and/or compatibility of inks with new reservoir material in an ink supply (e.g., as seen in off-axis system cartridges)

## SUMMARY OF THE INVENTION


**[0014]** Color ink sets suitable for use in ink-jet printers are provided. In accordance with the invention, a set of color inks for use in printer systems are provided and formulated to provide improved plain paper and special media performance while maintaining good printing characteristics. The inks and ink sets of the present invention exhibit excellent color performance and lightfastness across a range of media, robust K/Y bleed resistance on plain paper at fast print speeds, as well as excellent printability and reliability. Furthermore, the ink set enables good reliability in an environment having a relatively high concentration of precipitating agents. This reliability enables the use of precipitation bleed control mechanisms. The inks and ink sets of the present invention also work equally well in a synthetic fiber or foam-based (e.g., polyurethane foam) or a fiberless (foamless) system.

**[0015]** More specifically, a specific dye set for formulating yellow, magenta, and cyan inks is disclosed, a yellow dye comprising a mixture of acid yellow 23 (AY23) and direct yellow 132 (DY 132), a cyan dye comprising a mixture of acid blue 9 (AB9) and a cyan dye compound having the formula:





wherein PC represents a phthalocyanine nucleus (as disclosed in Patent Application No. WO 99/67334, the contents of which are incorporated herein by reference); and a magenta dye comprising a magenta dye compound having formula:

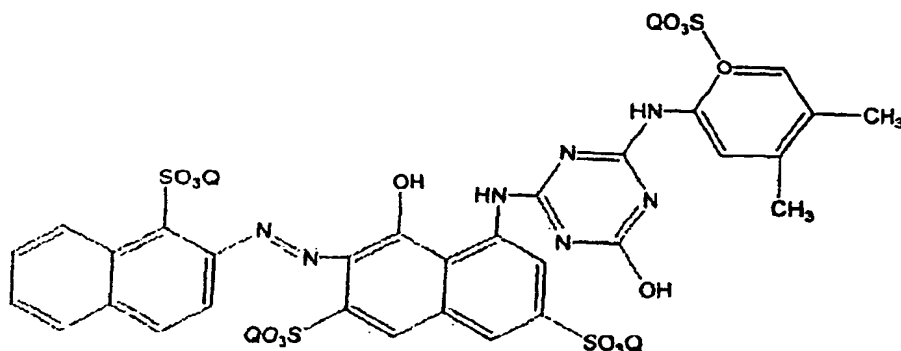

wherein Q is a cation.

#### DETAILED DESCRIPTION OF THE INVENTION

**[0016]** The invention described herein is directed to a specific ink set for printing ink-jet images using commercially available ink-jet printers, such as DESKJET® printers, and more particularly, off-axis ink-jet printers, such as the DESKJET 2200® printer, manufactured by Hewlett-Packard Company of Palo Alto, California. The ink set enables an ink-jet color printer to produce high quality color images having excellent color performance and lightfastness on a range of media, particularly on plain paper. Furthermore, the ink set enables good reliability, such as ink stability, and decap and recovery (e.g. crusting) in a variety of environments.

**[0017]** The present yellow, magenta, and cyan aqueous ink compositions each comprise in general from about 0.05 to about 20 wt % of at least one dye and a vehicle comprising the following components (in wt % of total ink composition): from about 5 to about 30 wt % of at least one organic solvent; 0 to about 5 wt % of at least one component independently selected from the group consisting of surfactants, buffers, precipitating agents and biocides. All concentrations herein are in weight percent of total ink composition, unless otherwise indicated. The purity of all components is that employed in normal commercial practice for ink-jet inks. In the practice of the invention, each ink color, namely, yellow, magenta, and cyan can comprise more than one dye load. That is, there can be one or more ink-jet ink supplies filled for each ink color, each supply having a different dye load or a different dye. As used herein, the term "ink" refers to the inks of the present invention.

#### COLORANTS

**[0018]** In selecting the colorants for the ink set of the present invention, the following factors were considered: reduced or absence of humid hue shift; good color performance, particularly, on plain paper; good lightfastness; good black to color bleed resistance; excellent printability and readability; and compatibility of inks with reservoir fiber-based materials in the ink supply. Of particular importance in the present invention was the selection of appropriate colorants capable of providing the aforementioned characteristics in a reservoir-based off-axis printer, as well as providing those attributes in a printer or pen lacking such a fiber material.

**[0019]** In order to achieve the above-mentioned goals, the dyes or colorants selected for the present ink set should exhibit good compatibility (e.g., stable in the ink vehicle) in various environments. For example, the selected colorants should exhibit little, if any, significant reactivity with precipitating agents when these two materials (i.e., colorant and precipitating agent) are formulated in the same ink and should remain soluble when formulated with a precipitating



agent. In other words the dyes should have sufficient solubility in the ink vehicle so that they would not form unwanted levels of precipitate by the precipitating agents or through reaction with other components in the ink. Additionally, the dyes should not react with the precipitant to form unwanted levels of compounds that will, either immediately or over time, drop out of solution. For example the dyes should not form insoluble complexes or salts that have a tendency to form aggregates that have decreased solubility in the ink vehicle over time in such levels as to interfere with the desired performance of the printing system.

**[0020]** The selected colorants must also exhibit good lightfastness on a wide range of media, particularly, special paper. It is also important that the colorants produce highly chromatic printed images having the appropriate hue, especially on plain paper.

**[0021]** It was found that many of the dyes that satisfied the first two requirements, namely, good solubility and lightfastness, produced printed images that (1) deviated from the ideal hue angle targets on plain paper, and/or (2) had low chroma on plain paper.


**[0022]** The dye set of the present invention, provides good color gamut on plain paper; good lightfastness; improved WY bleed, good pH stability, and good printing performance. The ink set of the present invention comprises:

a yellow ink comprising a mixture of acid yellow 23 (AY23) and direct yellow 132 (DY 132);  
a cyan ink comprising a mixture of acid blue 9 (AB9) and a cyan dye compound having the formula:



wherein PC represents a phthalocyanine nucleus; and

a magenta ink comprising a magenta dye having the formula:

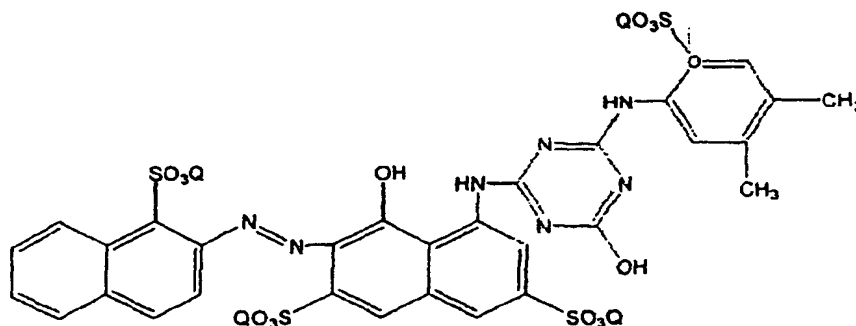

wherein Q is a cation. In a preferred embodiment, Q is independently selected the group of cations consisting of ammonium, substituted ammonium, sodium, lithium, potassium, and tetramethylammonium ion.

**[0023]** The inks of the present invention comprise from about 0.05 to about 20% dye; preferably, from about 0.1 to about 8%; and more preferably, from about 0.5 to about 5%; by weight, based on the total weight of the ink, based on the sodium form of the dyes. It should be understood that the actual salt form of the dye used in the ink may be different (e.g., the dye may be in the TMA form). The dyes may be in their salt form, such as an alkali metal (Na, K, or Li) or quaternary ammonium. Some of these salt forms, such as Na, are commercially available. Other salt forms can be made using well known techniques.

**[0024]** In one embodiment, the inks of the present invention comprise: at least one yellow ink having a visible light absorbance of from about 0.242 to about 0.620 at a  $\lambda_{\text{max}}$  of from 404 to 412 and at a 1:5,000 dilution in water; at least one cyan ink having a visible light absorbance of from about 0.08 to about 1.55 at a  $\lambda_{\text{max}}$  of from 624 to 632 and at a 1:5,000 dilution in water; at least one magenta ink having a visible light absorbance of from about 0.020 to

about 0.807 at a  $\lambda$ , of from 540 to 550 and at a 1: 10,000 dilution in water. In a more preferred embodiment the inks of the present invention comprise: at least one yellow ink having a visible light absorbance of from about 0.299 to about 0.451 at a  $\lambda$ , of from 404 to 412 and at a 1:5,000 dilution in water; at least one cyan ink having a visible light absorbance of from about 0.16 to about 0.80 at a  $\lambda$ , of from 624 to 632 and at a 1:5,000 dilution in water; at least one magenta ink having a visible light absorbance of from about 0.061 to about 0.404 at a  $\lambda$ , of from 540 to 550 and at a 1: 10,000 dilution in water. In a most preferred embodiment, the inks of the present invention comprise: at least one yellow ink having a visible light absorbance of from about 0.348 to about 0.404 at a  $\lambda$ , of from 404 to 412 and at a 1:5,000 dilution in water; at least one cyan ink having a visible light absorbance of from about 0.335 to about 0.400 at a  $\lambda$ , of from 624 to 632 and at a 1:5,000 dilution in water; at least one magenta ink having a visible light absorbance of from about 0.150 to about 0.170 at a  $\lambda$ , of from 540 to 550 and at a 1: 10,000 dilution in water.

#### ADDITIONAL COMPONENTS

**[0025]** Consistent with the requirements for this invention, various types of additives, as is commonly practiced in the art, may be employed in the inks to optimize the properties of the ink compositions for specific applications.

#### Precipitating Agent

**[0026]** Precipitating agents may be used to further enhance the characteristics of the ink set of the present invention. The precipitating agent is preferably of a type which upon contact (for example on the print medium) reacts with the anionic group (e.g., the anionic group such as carboxyl or sulfonate) associated with a colorant (such as a dye, or a self-stabilized pigment, or the ionic group on a dispersant associated with a dispersed pigment) in the ink (i.e., second ink) composition to form an insoluble salt, complex, or compound.

#### Vehicle

**[0027]** The inks of the present invention comprise an aqueous vehicle comprising the following components (in wt % of total ink composition): from about 5 to about 30 wt % of at least one water soluble organic solvent; 0 to about 5 wt % of at least one component independently selected from the group consisting of surfactants, buffers, biocides, and metal chelators; and the balance water.

#### Organic solvent

**[0028]** The inks of the present invention comprise from about 5 to about 35 wt % organic solvent. More preferably, the inks comprise from about 10 to about 30 wt % organic solvent, with a concentration from about 15 to about 25 wt % being the most preferred.

**[0029]** The water soluble organic solvents suitably employed in the present ink-jet ink compositions include any of, or a mixture of two or more, of such compounds as nitrogen-containing heterocyclic ketones, such as 2-pyrrolidone, N-methyl-pyrrolid-2-one (NMP), 1,3-dimethylimidazolid-2-one, and octyl-pyrrolidone; diols such as ethanediols (e.g., 1,2-ethandiol), propanediols (e.g., 1,2-propanediol, 1,3-propanediol, 2-ethyl-2-hydroxy-methyl-1,3-propanediol, ethyl-hydroxy-propanediol), butanediols (e.g., 1,2-butanediol, 1,3-butanediol, 1,4-butanediol), pentanediols (e.g., 1,2-pentanediol, 1,5-pentanediol), hexanediols (e.g., 1,6-hexanediol, 2,5-hexanediol, 1,2-hexanediol), heptanediols (e.g., 1,2-heptanediol, 1,7-heptanediol), octanediols (e.g., 1,2-octanediol, 1,8-octanediol); glycol ethers and thioglycol ethers, commonly employed in ink-jet inks, such as polyalkylene glycols such as polyethylene glycols (e.g., diethylene glycol (DEG), triethylene glycol, tetraethylene glycol), polypropylene glycols (e.g., dipropylene glycol, tripropylene glycol, tetrapropylene glycol), polymeric glycols (e.g., PEG 200, PEG 300, PEG 400, PPG 400), and thiodiglycol.

**[0030]** Preferably, the organic solvent comprises 1,2 diols of  $C_5$  -  $C_7$ , namely, 1,2-pentanediol, 1,2-hexanediol, and 1,2-heptanediol; and most preferably, 1,5-pentanediol is employed in the practice of the invention,

#### Surfactant

**[0031]** The inks of the present invention optionally comprise 0 to about 10 wt % surfactant. More preferably, the inks comprise from about 0.5 to about 5 wt % surfactant.

**[0032]** In the practice of the invention, one or more surfactants may optionally be used. Non-ionic surfactants, such as secondary alcohol ethoxylates (e.g., Tergitol series available from Union Carbide Co.), non-ionic fluoro surfactants (such as FC 170C available from 3M), non-ionic fatty acid ethoxylate surfactants (e.g., Alkamul PSMO-20 available from Rhone-Poulenc), and fatty amide ethoxylate surfactants (e.g., Aldamide L203 available from Rhone-Poulenc) are

preferred, with secondary alcohol ethoxylates being the most preferred. In the practice of the invention, the secondary alcohol ethoxylates serve to prevent color to color bleed by increasing the penetration of the inks into the print medium. Secondary alcohol ethoxylates are nonionic surfactants and are commercially available, for example, from Union Carbide Co. (Houston, Tex.) as the Tergitol series. Tergitol 15-S-5 is the preferred surfactant.

**[0033]** The secondary alcohol ethoxylates contain (a) an aliphatic chain having a prescribed number of carbon atoms in the chain, and (b) a prescribed number of ethoxylated units. These ethoxylates are commercially available as mixtures of ethoxylates, and so are described in terms of the predominance of a given compound. Secondary alcohol ethoxylates suitably employed in the practice of the invention predominantly have from about 12 to about 18 carbon atoms in the aliphatic chain, while the number of ethoxylated units is predominantly in the range of from about 4 to about 8 units. Thus, "Tergitol 15-S-5" represents a secondary alcohol ethoxylate surfactant predominantly having about 15 carbons in its aliphatic chain and about 5 ethoxylated units. Tergitol 15-S-5 is the most preferred surfactant.

#### Buffer

**[0034]** The inks of the present invention optionally comprise 0 to about 1.5 wt % buffer. More preferably, the inks comprise from about 0.0 to about 0.5 wt % buffer, with a concentration from about 0.0 to about 0.3 wt % being the most preferred. Buffers employed in the practice of the invention to modulate pH can be organic-based. Examples of preferably-employed buffers include Trizma Base, available from companies such as Aldrich Chemical (Milwaukee, Wis.), 4-morpholinepropanesulfonic acid (MES), and 4-morpholinepropanesulfonic acid (MOPS). Buffers employed should provide a pH ranging from about 3 to about 9 in the practice of the invention, preferably about 3 to about 5 and most preferably from about 3.7 to 4.2.

#### Metal Chelator

**[0035]** The inks of the present invention optionally comprise 0 to about 1.5 wt % metal chelator. More preferably, the inks comprise from about 0.1 to about 0.5 wt % metal chelator, with a concentration from about 0.1 to about 0.3 wt % being the most preferred.

**[0036]** Metal chelators employed in the practice of the invention are used to bind transition metal cations that may be present in the ink. Examples of preferably-employed metal chelators include: Ethylenediaminetetraacetic acid (EDTA), Diethylenetriaminepentaacetic acid (DTPA), trans-1,2-diaminocyclohexanetetraacetic acid (CDTA), (ethylenedioxy) diethylenedinitrilotetraacetic acid (EGTA), or other chelators that can bind transition metal actions. More preferably, EDTA, and DTPA; and most preferably, EDTA in its disodium dihydrate salt form is employed in the practice of the invention.

#### Biocide

**[0037]** The inks of the present invention optionally comprise 0 to about 5 wt % biocide. More preferably, the inks comprise from about 0 to about 2 wt % biocide, with a concentration from about 0.0 to about 0.5 wt % being the most preferred. Any of the biocides commonly employed in ink-jet inks may be employed in the practice of the invention, such as Nuosept 95, available from Huls America (Piscataway, N.J.); Proxel GXL, available from Zeneca (Wilmington, Del.); and glutaraldehyde, available from Union Carbide Company (Bound Brook, N.J.) under the trade designation Ucarcide 250.

#### EXAMPLES

**[0038]** Inks were formulated and different qualities of the formulated inks were measured in an effort to assess the benefits attained in the practice of the invention, such as, architecture, reliability (including recovery), pH sensitivity, K/Y bleed under various conditions, decap attributes, viscosity, bearding, kogation, humid hue shift/bleed, chroma, and lightfastness.

#### Print Sample Generation

**[0039]** Unless otherwise described, print samples of formulated inks, where necessary, were generated using Hewlett-Packard DeskJet® inkjet and off-axis printers, such as the DeskJet® 2200. The print media used included uncoated paper such as Gilbert Bond paper manufactured by Mead; and HP's photo glossy media for DeskJet88 Printers.



## Example 1

## Ink Optimization Experiments

[0040] Due to the complexity of various ink formulations, preliminary experiments were conducted to determine which specific components within the ink formulations affected ink performance sufficiently to warrant its inclusion in subsequent ink optimization experiments.

[0041] A number of variable ranges were determined in order to test ink performance. Dowfax 8390 (anionic surfactant available from Dow chemical) was tested at a lower limit of 0% and at an upper limit of 5%. Surfactant (Mackam OCT50) was tested at a lower limit of 2% wt. to an upper limit of 5% wt. Succinic acid was tested at a lower limit of 0% and at an upper limit of 5%. Three solvents were tested: 1,5-pentanediol; 2-pyrrolidone (2-P); and tetraethyleneglycol (TEG). Because a change in the amount of solvent can affect the total organic content of the formulation, various mixtures containing all three of these solvents were designed and tested, with the total solvent content held constant. The pH of the formulations was tested at levels ranging from 3.5 to 4.2.

## Stability and Reliability Determination

[0042] Inks were formulated and their stability was determined by accelerating the aging process by subjecting the ink samples to a number of variables, such as high temperature cycling, and thereafter evaluating the inks for print performance and unwanted precipitation. The inks were supplied to ink-jet printheads and used to generate print samples. The amount of printhead servicing (such as spitting, wiping, and priming) that was required to keep the printheads from having any adverse impact on image quality (because of missing or misdirected nozzles due to, for example, crusting or bearding) was determined.

[0043] A preferred vehicle formulation for the yellow ink composition is as follows:

Table I

Component	wt. %
Alkyl diol	8 to 16
Heterocyclic ketone	0 to 6
Polyethylene glycol	0 to 10
Octyl dimethyl glycine	1 to 5
Sodium hexadecyl diphenyloxide disulfonate	0 to 1
Secondary alcohol ethoxylate	0 to 1.0
Oleyl triethoxy monodiphosphate	0 to 0.4
EDTA	0.05 to 0.20
succinic acid	5 to 8

[0044] A more preferred vehicle formulation for the yellow ink composition (Yellow Formula 2) is as follows:

Table II

Component	wt. %
Alkyl diol	11 to 13
Heterocyclic ketone	4.0 to 5.5
Polyethylene glycol	3 to 4
Octyl dimethyl glycine	2 to 4
Sodium hexadecyl diphenyloxidedisulfonate	0.2 to 0.6
Secondary alcohol ethoxylate	0.3 to 0.5
Oleyl triethoxy monodiphosphate	0.2 to 0.3
EDTA	0.10 to 0.15
succinic acid	5.5 to 6.5

[0045] Yellow Formula 2 possesses the following properties:

TABLE III

Property	Parameters	Units	Specs	
			LSL	USL
Absorbance	@200ppm	AU	0.348	0.404
Lambda Maximum		nm	404	412
PH	@25°C	pH	3.7	4.1
Color L, CIELab	@ Abs 1.00		97	100
Color a			-22	-16
Color b			59	65

## Magenta Ink

[0046] In order to finalize the magenta ink composition, various components were tested to select optimum concentration limits of components making up the magenta ink formulation of the ink set of the present invention in order to achieve low cost, as well as good performance and reliability.

[0047] The tested ink compositions were:

Table IV

	Ink # 1	Ink # 2	Ink # 3	Ink # 4	Ink # 5
Absorbance @ 1:2000 dilution	0.796	0.797	0.789	0.798	0.791
Alkanediol	15%	15%	15%	15%	15%
Polyethylene glycol	3.30%	3.30%	3.30%	3.50%	2.00%
Octyl dimethyl Glycine	4.29%	3.50%	3.80%	3.80%	3.50%
Dicarboxylic acid 1	6%	6%	0.9%	0.9%	1.80%
Dicarboxylic acid 2	0.00%	0.00%	4.6%	4.6%	3.80%
Secondary alcohol ethoxylate	0.70%	0.71%	0.60%	0.60%	0.70%
Oleyl Triethoxy mono diphosphate	0.40%	0.40%	0.40%	0.40%	0.40%
Sodium hexadecyl diphenyloxide disulfonate	0.50%	0.50%	0.50%	0.50%	0.50%
Chelating agent	0.100%	0.100%	0.127%	0.127%	0.127%

[0048] The tested magenta ink formulations possess the following properties:

TABLE V

Magenta Candidates Optimization and Freeze Selection Results Summary Table					
	Ink # 1	Ink # 2	Ink # 3	Ink # 4	Ink # 5
Crusting performance at ambient	Acceptable	Acceptable -	Good	Good	Acceptable +
Crusting performance at cold/dry	Acceptable	Acceptable -	Good	Good	Acceptable
recoverability	Acceptable	Acceptable	V. Good	Acceptable	Acceptable
printing performance	Acceptable	Acceptable	Acceptable	Good	Acceptable
Kogation	Marginal	Marginal	Acceptable	Good	Marginal
Ink Stability	Pass	Pass	Pass	Pass	Pass
Cost	Expensive	Expensive	Least Costly	Least Costly	Less Costly
Comments	Rejected	Rejected	Runner up	Final Selection	Rejected

TABLE V (continued)

Magenta Candidates Optimization and Freeze Selection Results Summary Table					
	Ink # 1	Ink # 2	Ink # 3	Ink # 4	Ink # 5

[0049] Referring to TableV, it can be observed that all tested ink formulations passed the stability tests. Both ink # 3 and ink # 4 performed best with respect to crusting performance, as compared with the other formulations. Of significant importance in the selection criteria, ink # 3 and ink # 4 contain higher ratios of dicarboxylic acid # 1 and dicarboxylic acid # 2, making them the lowest cost ink formulations in the group. Ink # 4 should further reduce ink cost since it may require less cycle times to purify. Ink formulations tested for kogation had been in contact with IDS grease (Dow 345 1). Ink # 4 performed best among all inks in this regard. In view of these results, ink # 4 was selected as the ink formulation of choice for formulating the magenta ink for use in the present invention.

[0050] A preferred vehicle formulation for the magenta ink composition is as follows:

Table VI

Component	wt. %
alkyl diol	8 to 16
polyethylene glycol	0 to 10
heterocyclic ketone	0 to 5
octyl dimethyl glycine	1 to 5
Glutaric Acid	0 to 2
sodium hexadecyl diphenyloxide disulfonate	0 to 1
secondary alcohol ethoxylate	0.2 to 1.0
oley triethoxy mono diphosphate	0.1 to 0.6
EDTA	0.05 to 0.20
succinic acid	4 to 8

[0051] A more preferred fomulation for the magenta ink composition is as follows:

Table VII

Component	Wt. %
Alkyl Diol	14 to 16
Polyethylene glycol	3 to 4
Octyl dimethyl glycine	2.0 to 4.0
Glutaric Acid	0.7 to 1.1
Sodium hexadecyl diphenyloxide disulfonate	0.3 to 0.7
Secondary alcohol ethoxylate	0.5 to 0.7
Oleyl triethoxy monodiphosphate	0.3 to 0.5
EDTA	0.10 to 0.15
succinic acid	4 to 5

[0052] The more preferred magenta ink formulation possesses the following properties:

TABLE VIII

Property	Parameters	Units	Specs	
			LSL	USL
Absorbance	@100ppm	AU	0.15	0.17
Lambda Maximum		nm	540	550
pH	@25°C	pH	3.8	4.2
Color L. CIELab	@Abs 1.00		65	73

TABLE VIII (continued)

Property	Parameters	Units	Specs	
			LSL	USL
Color a			67	75
Color b			-22	-14

cyan Ink

[0053] The cyan ink selected for use in the present inkjet color inkset of the present invention was based on inks used in inkjet printers (non-off axis systems) containing cyan dyes, such as Acid Blue 9 (AB9). In view of the foregoing, previously-known or slightly modified cyan ink formulations were employed.

[0054] A preferred vehicle formulation for the cyan ink composition is as follows:

Table IX


Component	wt. %
Alkyl diol	8 to 15
Heterocyclic ketone	0 to 7
Polyethylene glycol	0 to 10
Octyl dimethyl glycine	1.5 to 5.0
Sodium hexadecyl diphenoxide disulfonate	0 to 1
Secondary alcohol ethoxylate	0.4 to 0.8
Oleyl triethoxy monodiphosphate	0.3 to 0.5
EDTA	0.10 to 0.14
succinic acid	4.5 to 6.5

[0055] The more preferred cyan ink formulation possesses the following properties:



TABLE X

Property	Parameters	Units	Specs	
			LSL	USL
Absorbance	@200ppm	AU	0.335	0.400
Lambda Maximum		nm	624	632
pH	@25°C	pH	3.8	4.2
Color L. CIELab	@Abs 1.00		70	85
Color a			-38	-32
Color b			-31	-25

[0056] Thus, there has been disclosed a dye set for formulating yellow, magenta, and cyan inks, the dye set comprising a yellow dye mixture of Acid Yellow 23 (AY23) and Direct Yellow 132 (DY 132); a magenta dye having the formula:

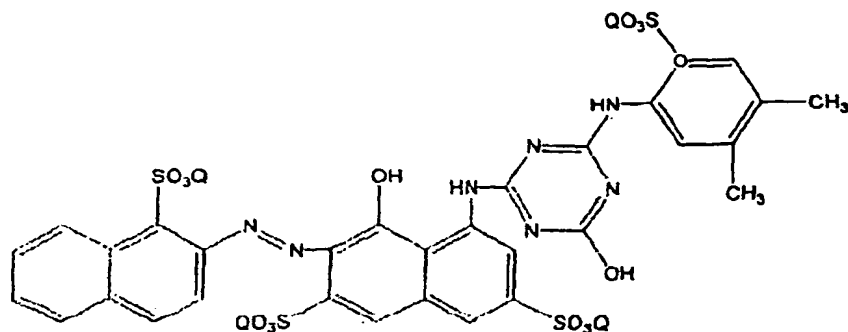

wherein Q is a cation; and  
a cyan dye mixture comprising a compound having the formula:



wherein PC represents a phthalocyanine nucleus  
and acid blue 9.

[0057] It will be readily apparent to those skilled in the art that various changes and modifications of an obvious nature may be made without departing from the spirit of the invention. All such changes and modifications are considered to fall within the scope of the invention as defined by the appended claims.

## Claims

1. An set of inks containing yellow, magenta, and cyan dyes for ink-jet printing, said set of inks comprising:



at least one yellow ink containing at least one yellow colorant having a visible light absorbance of from about 0.87 to about 1.01 at a  $\lambda_{\text{max}}$  of from 404 to 412 and at a 1:2,000 dilution in water;  
at least one cyan ink containing at least one cyan colorant having a visible light absorbance of from about 0.84 to about 0.96 at a  $\lambda_{\text{max}}$  of from 624 to 632 and at a 1:2,000 dilution in water;  
at least one magenta ink containing at least one magenta colorant having a visible light absorbance of from about 0.75 to about 0.85 at a  $\lambda_{\text{max}}$  of from 540 to 550 and at a 1:2,000 dilution in water.

2. A method for printing using an ink-jet printer, comprising printing from a set of ink-jet inks onto a printing medium, said ink set comprising:

providing at least one yellow ink containing at least one yellow colorant having a visible light absorbance of from about 0.87 to about 1.01 at a  $\lambda_{\text{max}}$  of from 404 to 412 and at a 1:2,000 dilution in water;  
providing at least one cyan ink containing at least one cyan colorant having a visible light absorbance of from about 0.84 to about 0.96 at a  $\lambda_{\text{max}}$  of from 624 to 632 and at a 1:2,000 dilution in water;  
providing at least one magenta ink containing at least one magenta colorant having a visible light absorbance of from about 0.75 to about 0.85 at a  $\lambda_{\text{max}}$  of from 540 to 550 and at a 1:2,000 dilution in water.


3. The set of inks of claims 1 or 2, wherein said yellow colorant comprises direct yellow 132.

4. The set of inks of claims 1 or 2, wherein said cyan colorant comprises a cyan dye compound having the formula:



wherein Pc represents a phthalocyanine nucleus.

5. The set of inks of claims 1 or 2, wherein said magenta ink comprises a dye compound having formula (II):

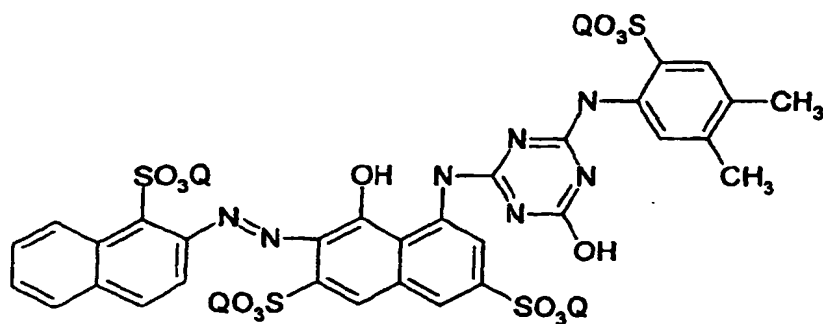

wherein Q is a cation.

6. The ink set of claims 1 or 2, wherein each of said cyan, yellow, and magenta inks comprises from about 0.5 to about 5% dye.
7. The ink set of claims 1 or 2, wherein each of said cyan, yellow, and magenta inks has a pH of from about 3.5 to about 4.2.
8. The ink set of claims 1 or 2, wherein each of said cyan, yellow, and magenta inks further comprises 8 to 16 wt % of an alkyl diol and from 0 to 10 wt % of a polyvinyl glycol.
9. The ink set of claims 1 or 2, wherein said yellow ink further comprises from about 5.5 to about 6.0 wt % of succinic acid.
10. The ink set of claims 1 or 2, wherein each of said cyan, yellow, and magenta inks comprises from about 0.5 to about 20% dye.

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

**EP 1 254 932 A3**

(12)

**EUROPEAN PATENT APPLICATION**

(88) Date of publication A3:  
**21.01.2004 Bulletin 2004/04**

(51) Int Cl.7: **C09D 11/00**

(43) Date of publication A2:  
**06.11.2002 Bulletin 2002/45**

(21) Application number: **02253012.5**

(22) Date of filing: **29.04.2002**

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

- **Austin, Mary E.**  
**Corvallis, OR 97330 (US)**
- **Lauw, Hiang P.**  
**Corvallis, OR 97330 (US)**
- **Parazak, Dennis P.**  
**Oceanside, CA 92056 (US)**
- **Rehman, Zia**  
**Corvallis, OR 97330 (US)**

(30) Priority: **04.05.2001 US 848810**



(71) Applicant: **Hewlett-Packard Company**  
**Palo Alto, CA 94304 (US)**

(74) Representative: **Jackson, Richard Eric et al**  
**Carpmaels & Ransford,**  
**43 Bloomsbury Square**  
**London WC1A 2RA (GB)**

(72) Inventors:  
• **Adamic, Raymond J.**  
**Corvallis, OR 97330 (US)**


(54) **Dye based ink set for ink jet printing**

(57) Color ink sets for use in printer systems are provided and formulated to provide improved plain paper and special media performance while maintaining good printing characteristics. The inks and ink sets of the present invention exhibit excellent color performance and lightfastness across a range of media, robust K/Y bleed resistance on plain paper at fast print speeds, as well as excellent printability and reliability. A specific dye set for formulating yellow, magenta, and cyan inks comprises a mixture of acid yellow 23 (AY23) and direct yellow 132 (DY132), a cyan dye compound having the formula:



wherein Pc represents a phthalocyanine nucleus; and a magenta dye compound having formula:

EP 1 254 932 A3

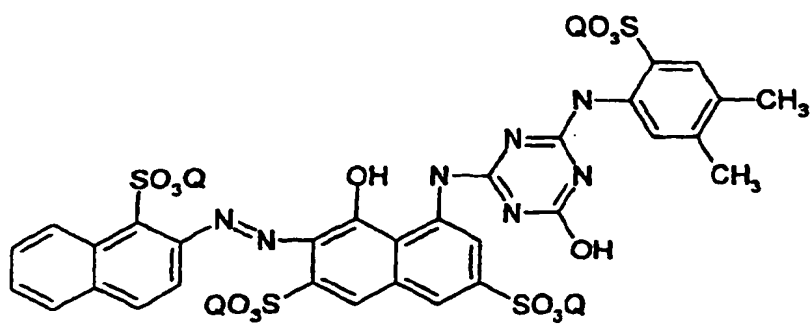

wherein Q is a cation.





European Patent  
Office

# PARTIAL EUROPEAN SEARCH REPORT

Application Number

which under Rule 45 of the European Patent Convention EP 02 25 3012  
shall be considered, for the purposes of subsequent  
proceedings, as the European search report

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 560 766 A (GUNDLACH KURT B) 1 October 1996 (1996-10-01) * claims; examples *	1-4,6-10	C09D11/00
X	US 5 772 742 A (WANG PATRICIA A) 30 June 1998 (1998-06-30) * column 5, line 26; tables 2-5 *	1-4,6-10	
Y	WO 99 67334 A (AVECIA LTD ;KENWORTHY MARK (GB); ROBERTSON COLIN DICK (GB)) 29 December 1999 (1999-12-29) * claims; examples *	3,4	
Y	EP 0 719 847 A (SEIKO EPSON CORP) 3 July 1996 (1996-07-03) * claims *	3,4	
A	EP 0 997 506 A (HEWLETT PACKARD CO) 3 May 2000 (2000-05-03) * claim 15 *	9	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			C09D
<b>INCOMPLETE SEARCH</b> <p>The Search Division considers that the present application, or one or more of its claims, does/do not comply with the EPC to such an extent that a meaningful search into the state of the art cannot be carried out, or can only be carried out partially, for these claims.</p> <p>Claims searched completely :</p> <p>Claims searched incompletely :</p> <p>Claims not searched :</p> <p>Reason for the limitation of the search:</p> <p>see sheet C</p>			
Place of search		Date of completion of the search	Examiner
MUNICH		28 November 2003	Ellrich, K
<b>CATEGORY OF CITED DOCUMENTS</b> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  &amp; : member of the same patent family, corresponding document</p>			

EP01254932A3 (PACU7)



European Patent  
Office

INCOMPLETE SEARCH  
SHEET C

Application Number

EP 02 25 3012

Claim(s) searched completely:  
3-10

Claim(s) searched incompletely:  
1-2

Reason for the limitation of the search:

Present claims 1-2 relate to a product defined by reference to the following parameter(s):

P1: "visible light absorbance" of yellow, cyan and magenta inks. For an exact assessment the "layer thickness" of the specimen used for the evaluation is missing. Consequently, the use of these parameters in the present context is considered to lead to a lack of clarity within the meaning of Article 84 EPC. It is impossible to compare the parameters the applicant has chosen to employ with what is set out in the prior art. The lack of clarity is such as to render a meaningful complete search impossible. Consequently, the search has been restricted to: claims 1-2 combined with the features of claims 3-5

# ANNEX TO THE EUROPEAN SEARCH REPORT ON EUROPEAN PATENT APPLICATION NO.

EP 02 25 3012

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

28-11-2003

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
US 5560766	A	01-10-1996	JP	8333539 A	17-12-1996
US 5772742	A	30-06-1998	CN	1198456 A	11-11-1998
			EP	0877064 A2	11-11-1998
			JP	3133981 B2	13-02-2001
			JP	10329403 A	15-12-1998
			JP	2000109737 A	18-04-2000
			TW	422872 B	21-02-2001
WO 9967334	A	29-12-1999	AT	247693 T	15-09-2003
			AU	4278999 A	10-01-2000
			CN	1116364 B	30-07-2003
			DE	69910581 D1	25-09-2003
			EP	1239010 A1	11-09-2002
			EP	1093492 A1	25-04-2001
			WO	9967334 A1	29-12-1999
			JP	2002522561 T	23-07-2002
			US	6149722 A	21-11-2000
EP 0719847	A	03-07-1996	DE	69517783 D1	10-08-2000
			DE	69517783 T2	02-11-2000
			EP	0719847 A1	03-07-1996
			WO	9529208 A1	02-11-1995
			JP	3430512 B2	28-07-2003
			US	5704969 A	06-01-1998
EP 0997506	A	03-05-2000	US	2001008908 A1	19-07-2001
			EP	0997506 A1	03-05-2000
			JP	2000129184 A	09-05-2000
			US	2001018472 A1	30-08-2001

EPO FORM P0458

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82